



[Find more details in our online catalogue](#)

## Technical parameters

Unit	
Frequency	50; 60 Hz
Voltage (nominal)	230 V
Phases	1~
Recommended fuse	10 A
Enclosure class	IP24
Speed regulation	Stepless
Product type	Heat recovery unit
Temperature	-20 to 40 °C
Preheater / Reheater	
Input power, reheater	0.5 kW
Supply fan	
Input power (P1), supply fan	81 W
Supply air filter	
Filter class, supply air	ePM1 70%
Extract air filter	
Filter class, extract air	ePM10 60%
Exchanger	
Heat exchanger rotor drive type	Variable speed
Heat exchanger	Rotating
Return fan / Extract fan	
Input power (P1), extract fan	81 W
Others	
Fan control	Stepless voltage control
Installation type	Vertical
Supply side	Right
Color casing	
Color casing	White
Color casing, RAL	RAL 9003

## Dimension

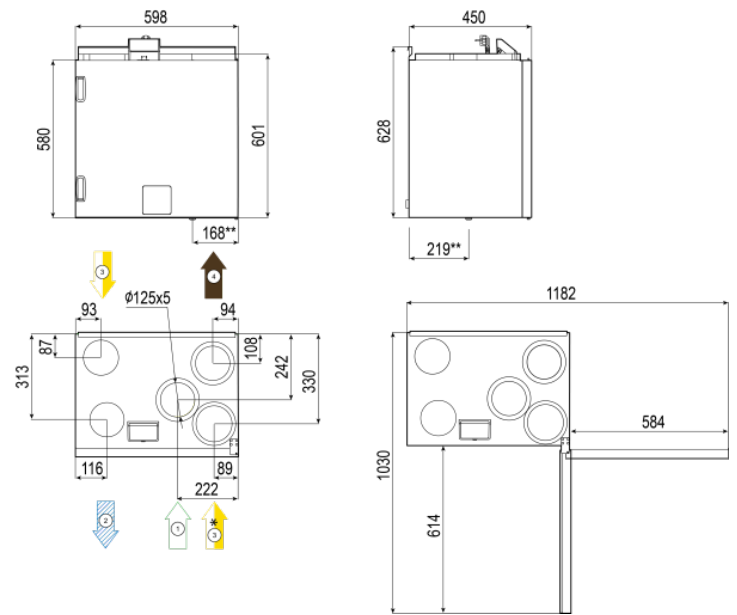

\* Connection for cooker hood

\*\*\* Drainage connection

- 1 Outdoor air
- 2 Supply air
- 3 Extract air
- 4 Exhaust air

**Dimensions and weights**


Weight	46 kg
--------	-------

**ERP**


Energy class, Basic unit	A
--------------------------	---

Energy class, Local demand	A
----------------------------	---

## Sissepuhe - Tootluse kõver

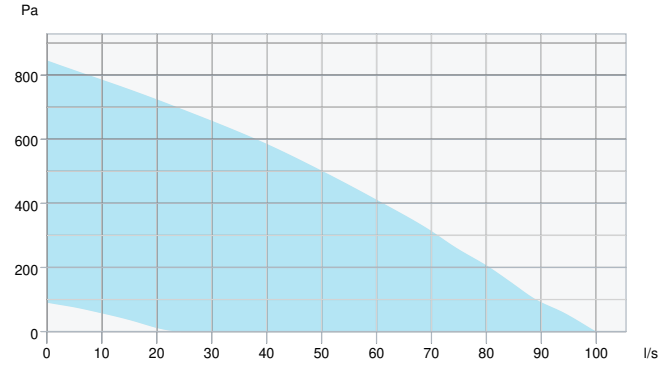

## Väljavõte - Tootluse kõver

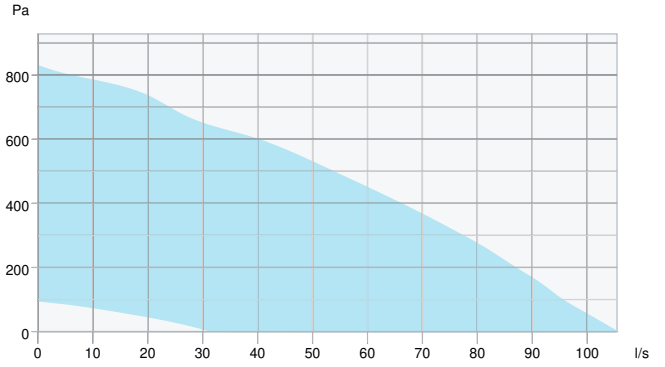

Seade	Sissepuhe	Väljavõte
Air density	1.204 kg/m³	
Sissepuhke õhu temperatuur	Suvi Talv - -20.0 °C	
Helirõhu tase	Kokku	

## Accessories

PF VTR 275 STD kit (278568)  
 SAVE LIGHT Black (319119)  
 SAVE TOUCH Black (138078)  
 CB heater connection kit 1 ~ (142852)  
 Presence detector/IR24-P (6995)  
 PSS20 Transformer 24V (202692)  
 RMK-T (153548)  
 Systemair-1 CO2 duct sensor (14906)  
 VAV/CAV conversion kit (140777)  
 CB 125-1,2 230V/1 Duct heater (5290)  
 CEC Cable w/plug 6m (24783)  
 Duct sensor -30-70C (211524)  
 LDC 125-600 Silencer (5190)  
 Plastic Drainage kit (146077)  
 Surface sensor -30-150C (211523)  
 392-10/B Slimline White (77265)  
 602-10/B Cookerhood White (47561)  
 722-10/B TENDER Wall 600 white (78978)  
 762-10/B OPAL Wall 600 steel (78970)  
 772-10/B OPAL Free 900 steel (78972)  
 782-10/B STIL Wall 900 steel (78974)  
 CLASSIC - B White (326802)  
 CVVX 125 Combi grille, white (26422)  
 MONOLIT - B White (326800)  
 RVAZ4 24A Actuator 0-10V (9862)  
 TUNE-R-125-3-M1 (311938)  
 TUNE-R-125-3-M4 (311968)  
 ZTR 15-0,4 valve 3-way (9670)  
 ZTV 15-0,4 2-way valve (9829)

SAVE CONNECT 2.0 (399999)  
 SAVE LIGHT White (319118)  
 SAVE TOUCH White (138077)  
 PF VTR 275 OPT kit (278569)  
 Pressure guard with pitot tube (212987)  
 RMK (153549)  
 SAVE Wall Mounted Kit (140736)  
 Systemair-E CO2 RH Temperature (211522)  
 VBC 125-3 Water heating batt (9839)  
 CEC Cable w/plug 12m (24782)  
 CWK 125-3-2,5 Duct cooler,circ (30021)  
 FK 125 Fast clamp (1608)  
 LDC 125-900 Silencer (5191)  
 RS-24V (159484)  
 VBC 125-2 Water heating batt (5457)  
 602-10/B Cookerhood S.Steel (47562)  
 722-10/B TENDER Wall 600 steel (78976)  
 722-10/B TENDER Wall 900 steel (78977)  
 762-10/B OPAL Wall 900 steel (78971)  
 782-10/B STIL Wall 600 steel (78973)  
 792-10/B STIL Free 900 steel (78975)  
 CVVX 125 Combi grille, black (26421)  
 MONOLIT - B S.Steel (326801)  
 Room sensor 0-50C (211525)  
 SPI-125 C Iris damper (6751)  
 TUNE-R-125-3-M2 (311948)  
 TUNE-R-125-3-M5 (311978)  
 ZTR 15-0,6 valve 3-way (6573)  
 ZTV 15-0,6 2-way valve (6571)

## Documents

Control panel installation quick guide  
 Energy label placement quick guide  
 Installation manual SAVE CONNECT 2.0  
 Installation Operation Maintenance manual  
 Modbus variable list  
 Service and Accessories installation manual  
 Eurovent Certification Diploma  
 Commissioning record  
 Technical fiche  
 Schematic layout and description of components  
 Electrical diagrams for accessories  
 Wiring diagram